


LIGHTWEIGHT TERMINAL TEST DEVICE



Includes a pressure regulator and carrying case with hanger to attach the device to a knuckle flag hole or a car handhold.

FRONT

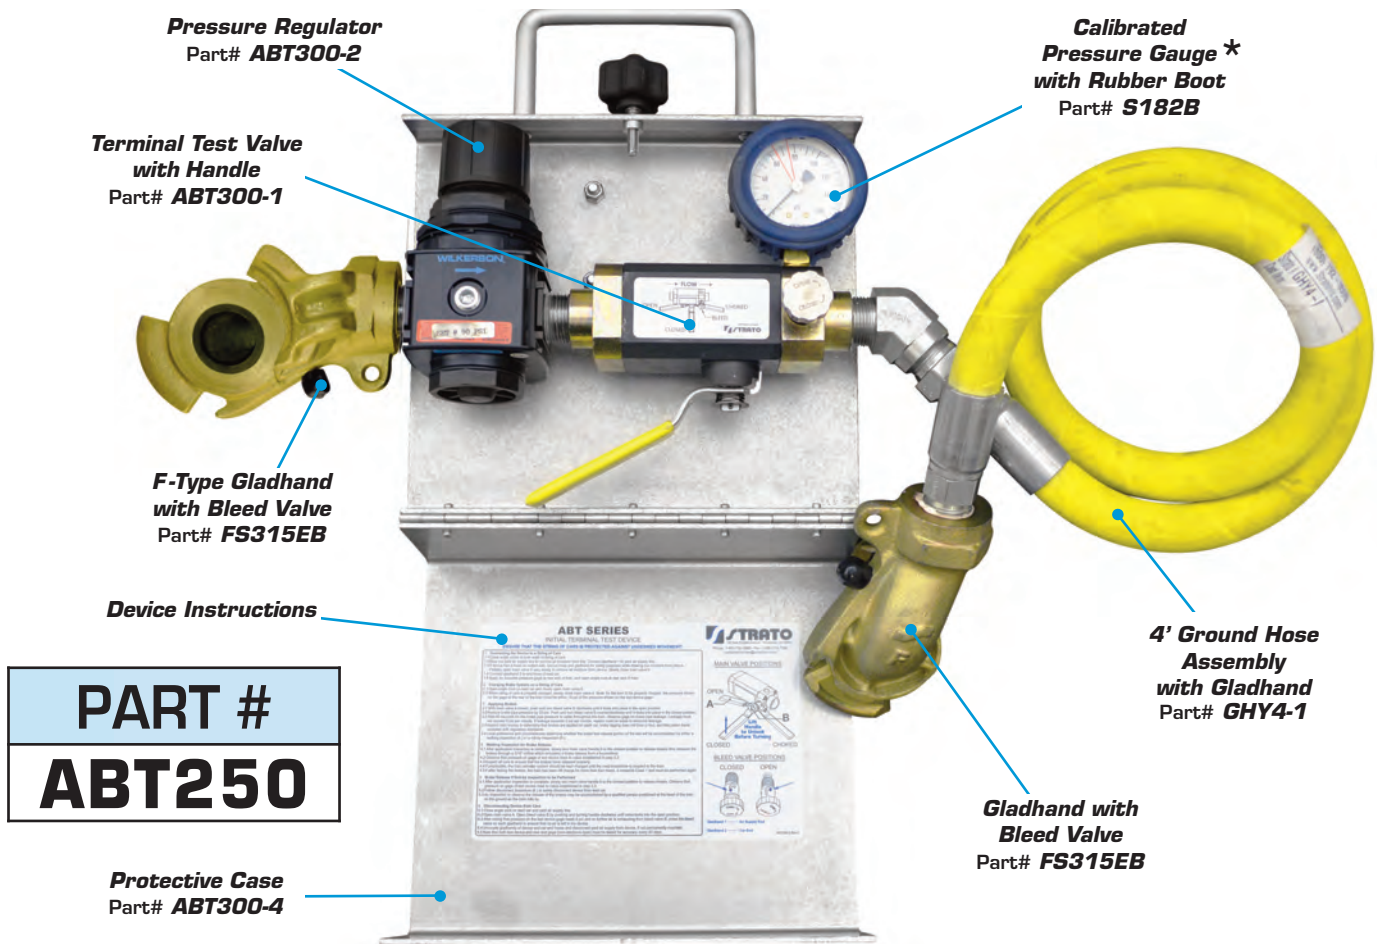

Carrying Case with Hanger



BACK

* The pressure gauge needs to be calibrated every 92 days in accordance with FRA Title 49, Section 232, Paragraph (d); all devices are calibrated at time of shipment and labeled with the next calibration date. A replacement pressure gauge can be purchased separately – fully calibrated and ready to install on the terminal test device. (Strato Part # S182B)


FRA rules allow a terminal test device to be used to charge and test the train using a yard air source.

Customer Service - Phone: (800) 792-0500 Fax: (800) 378-7286

customerservice@stratoinc.com

100 New England Avenue, Piscataway, NJ 08854

LIGHTWEIGHT TERMINAL TEST DEVICE

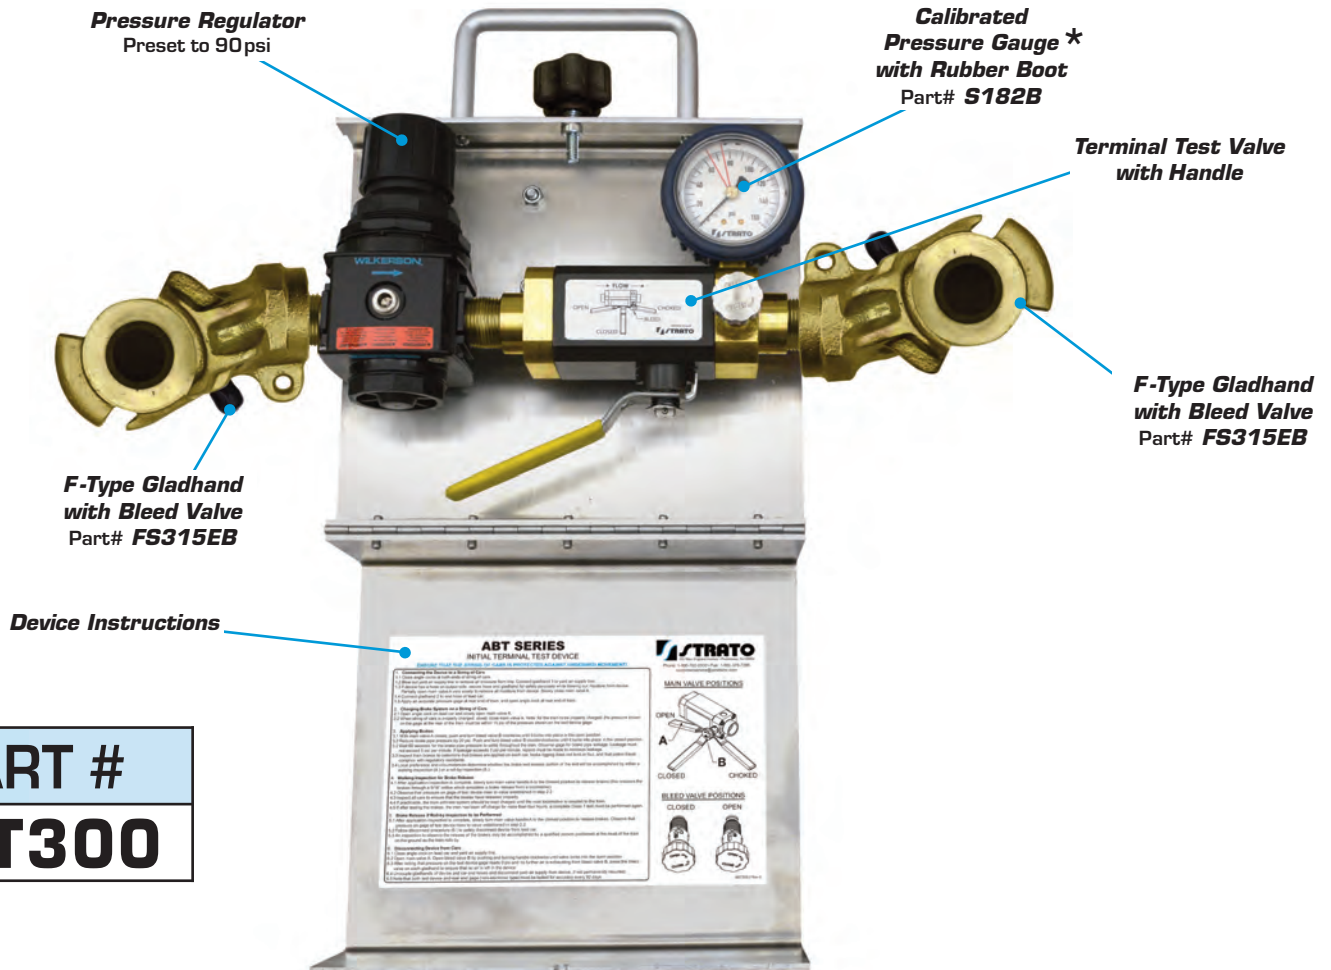

Includes a pressure regulator and carrying case with hanger to attach the device to a knuckle flag hole or a car handhold.



* The pressure gauge needs to be calibrated every 92 days in accordance with FRA Title 49, Section 232, Paragraph (d); all devices are calibrated at time of shipment and labeled with the next calibration date. A replacement pressure gauge can be purchased separately – fully calibrated and ready to install on the terminal test device. (Strato Part # S182B)

FRA rules allow a terminal test device to be used to charge and test the train using a yard air source.

Customer Service - Phone: (800) 792-0500 Fax: (800) 378-7286
customerservice@stratoinc.com

100 New England Avenue, Piscataway, NJ 08854