


# RUN-A-ROUND HOSE

Deal with air line problems quickly, easily and economically!

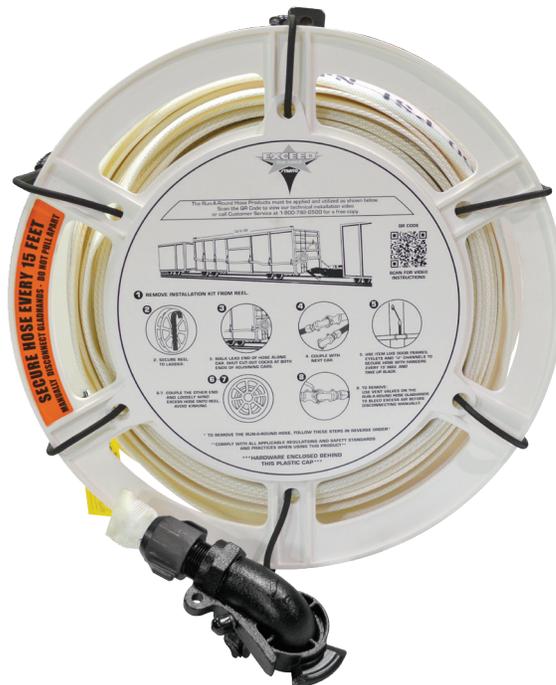

**PART #**  
**SR1000**

- Get a train moving again within 15 minutes of identifying a crippled car.
- No longer need to move the crippled car to a siding.
- For use on cars up to 89 feet in length. (Multiple units can be connected.)
- Reel diameter: 19.5".
- One person can install without tools.
- Replacement components available.

### Accessories included




**Cinch Cord with Hooks**



**Rope Hangers**

Run-A-Round Hose in Application

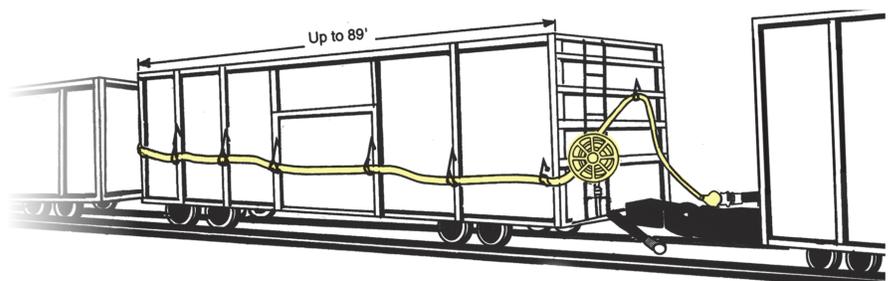


# RUN-A-ROUND HOSE

The Run-A-Round Hose Products must be applied and utilized as shown below.  
Scan the QR Code to view our technical installation video.

QR CODE



Scan for video instructions

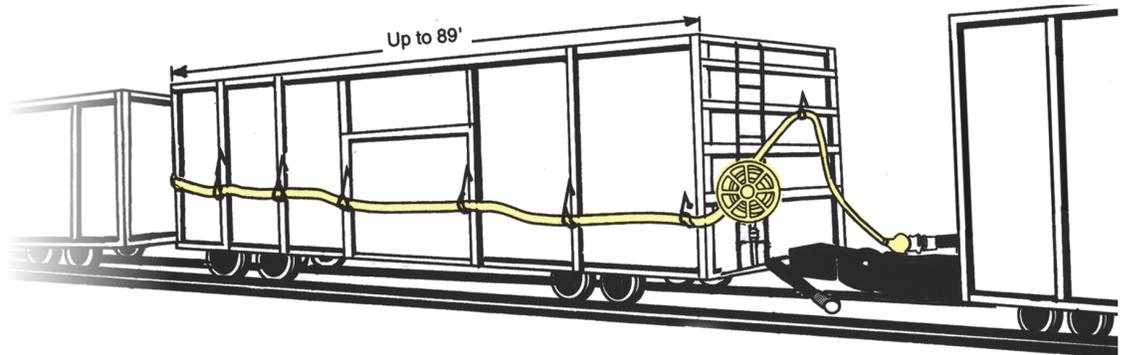

1



Remove installation kit from reel.


Secure reel to ladder.

2




Walk lead end of hose along car. Shut cut-out cocks at both ends of adjoining cars.

3



Couple with next car.

4




Use items like door frames, eyelets and "u" channels to secure hose with hangers. *Take up slack.*

5



Couple the other end and loosely wind excess hose onto reel. ***Avoid kinking.***

6



To remove: use vent valves on the Run-A-Round hose gladhands to bleed excess air before disconnecting manually.

## IMPORTANT

The Run-A-Round hose **MUST** be secured every 15 ft. or less and the excess hose **MUST** be rewound loosely on the reel and secured before air pressure is applied. Manually disconnect gladhands.

- Comply with all applicable regulations and safety standards and practices when using this product.
- The Run-A-Round hose should never be used on any application where passengers are being transported.
- To remove the run-a-round hose, follow steps 1-6 in reverse order.

## WARRANTY

Strato warrants that the run-a-round hose will be free from defects in material and workmanship. The sole responsibility of Strato shall be to replace or repair any product proved to be defective. Any transportation charges incident to such replacement or repair shall be paid by Strato. This warranty shall not apply to any product which has been subject to misuse or neglect, damaged by accident, or rendered defective by reason of improper installation or use as detailed in our technical support video and instruction sheet. Strato shall not be liable for special, indirect, or consequential damages. This warranty is in lieu of any and all other warranties, express or implied and of any other responsibility of Strato.