STRATO

PRODUCT INFORMATION

WELD SPACERS

SOCKET WELD CONTRACTION RING

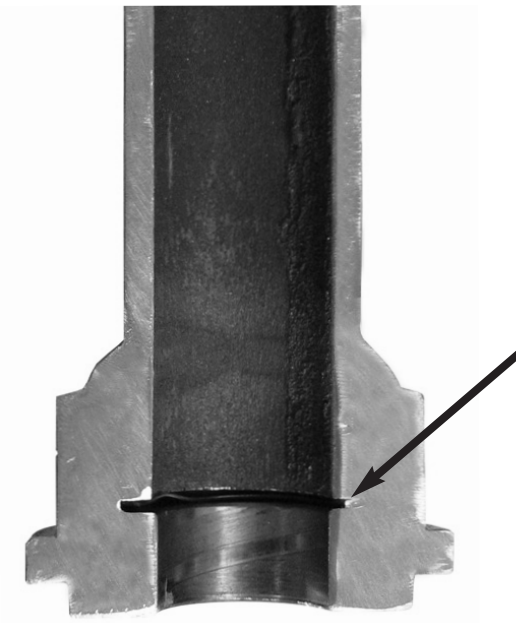

Socket weld contraction ring contracts to allow for expansion of the pipe into the fitting during welding.

Strato's Weld Spacers provide 1/16" of space, allowing the pipe to expand during welding and – eliminating the potential for cracks.

AS PER AAR STANDARD S-402, and ANSI, ASME & U.S. Military Codes

"There should be at least 1/16-in. clearance between the end of the pipe and socket before welding to minimize the potential for failure resulting from thermal or mechanical fatigue."

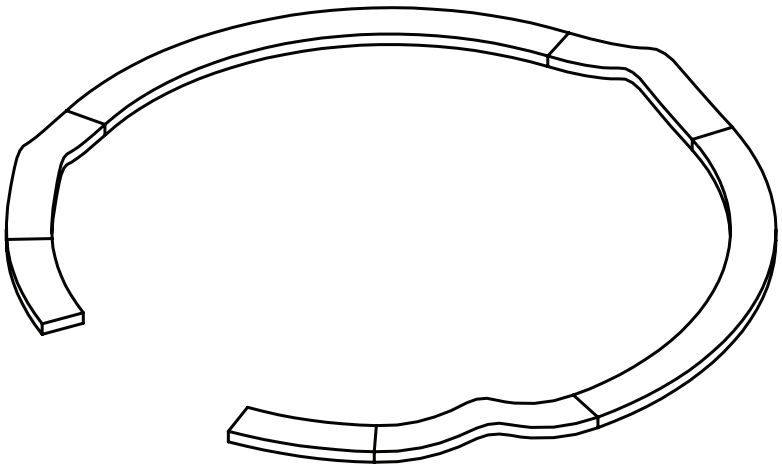

PART #	PIPE SIZE
WS6	3/8"
WS8	1/2"
WS12	3/4"
WS16	1"
WS20	1-1/4"

We can insert weld spacers into any of our weld fitting or branch pipe tees.

Call Us for Details

Customer Service - Phone: (800)792-0500 Fax: (800)378-7286

customerservice@stratoinc.com

100 New England Avenue, Piscataway, NJ 08854

Date: 1.27.17